

30VA EI 66-23 EI6623 Series 50/60Hz PCB Mount Transformers

Meisongbei



Features


- Vacuum filling
- Two compartments bobbins
- Self-extingFAUshing plastics UL 94 VO
- Degree of protection IP 00
- 700 grams weight



Applications

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom


Physical Characteristics (Unit: mm)

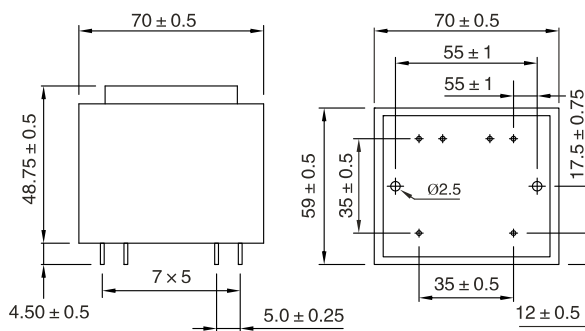

Recommended Drill-hole Diameter for 1.3mm pins
Recommended Drill-hole Diameter for Mountings=4 mm

Technical Information

- Resin class B CEI 85 (20000 h testing to CEI 126)
- Fuse protection on secondary side to be assumed by customer (production on request)
- 30 V and 36V models are VDE EN61558-2-6 certified
- Insulation voltage 4 KV
- 100% tested production
- Certification : CCA procedure on request

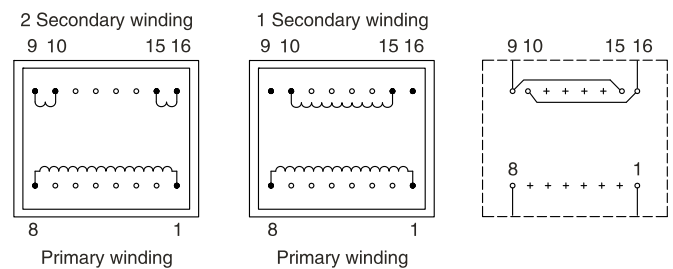

Electrical Characteristics

Primary Voltage: 230						Primary Voltage: 115					
Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)	Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)
EI662301	6	5000	6.9	T50B	30	EI662313	6	5000	6.9	T50B	30
EI662302	9	333	10.3	T50B	30	EI662314	9	333	10.3	T50B	30
EI662303	12	2500	13.8	T50B	30	EI662315	12	2500	13.8	T50B	30
EI662304	15	2000	17.2	T50B	30	EI662316	15	2000	17.2	T50B	30
EI662305	18	1667	20.8	T50B	30	EI662317	18	1667	20.8	T50B	30
EI662306	24	1250	27.7	T50B	30	EI662318	24	1250	27.7	T50B	30
EI662307	2 x 6	2 x 2500	2 x 6.9	T50B	30	EI662319	2 x 6	2 x 2500	2 x 6.9	T50B	30
EI662308	2 x 9	2 x 1667	2 x 10.3	T50B	30	EI662320	2 x 9	2 x 1667	2 x 10.3	T50B	30
EI662309	2 x 12	2 x 1250	2 x 13.8	T50B	30	EI662321	2 x 12	2 x 1250	2 x 13.8	T50B	30
EI662310	2 x 15	2 x 1000	2 x 17.2	T50B	30	EI662322	2 x 15	2 x 1000	2 x 17.2	T50B	30
EI662311	2 x 18	2 x 833	2 x 20.8	T50B	30	EI662323	2 x 18	2 x 833	2 x 20.8	T50B	30
EI662312	2 x 24	2 x 625	2 x 27.7	T50B	30	EI662324	2 x 24	2 x 625	2 x 27.7	T50B	30